Table 7-5 1FK7034 CT

Technical data	Code	Unit	–5AK71	
Configuration data				
Rated speed	n_N	RPM	6000	
No. of poles	2p		6	
Rated torque (100 K)	$M_{N\ (100\ K)}$	Nm	1.0	
Rated current (100 K)	I_N	A	1.3 1.35	
Static torque (60 K)	$M_{0\ (60\ K)}$	Nm	1.6	
Static torque (100 K)	$M_{0\ (100\ K)}$	Nm	1.6	
Stall current (60 K)	$I_{0\ (60\ K)}$	A	1.9 0.98	
Stall current (100 K)	$I_{0\ (100\ K)}$	A	0.9	
Moment of inertia (with brake)	J_{MotBr}	10^{-4} kgm^2		
Moment of inertia (without brake)	J_{Mot}	10^{-4} kgm^2	6000 0.63	
Optimum operating point	n_{opt}	RPM		
	P_{opt}	kW	10000	
Optimum speed	$n_{max\ mech}$	RPM	10000	
Optimum power	$n_{max\ Inv}$	RPM	6.5	
Limiting data	M_{max}	Nm	8	
Max. permissible speed (mech.)	I_{max}	A	0.86	
Max. permissible speed (converter)			55	
Max. torque	k_T	Nm/A	4.5 16.5	
Max. current	k_E	V/1000 RPM	3.7	
Physical constants	R_{Str}	Ohm	1.6	
	L_D	mH	30 5500	
Torque constant	T_{el}	ms	4.0	
Voltage constant	T_{mech}	ms	3.7	
Winding resistance at 20°C	T_{th}	min		
Cyclic inductance	c_t	Nm/rad	3	
Electrical time constant	m_{MotBr}	kg	6	
Mechanical time constant	m_{Mot}	kg	4.9	
Thermal time constant				
Shaft torsional stiffness		A		
Weight with brake		A		
Weight without brake		Nm		
Recommended motor module 6SL312_-_TE13-0AA_				
Rated current converter	$I_{N\ Inv}$			
Max. current converter	$I_{max\ Inv}$			
Max. torque at $I_{max\ Inv}$	$M_{max\ Inv}$			

e-Servo

For motor		Dimensions in mm (in)											Resolver					
													without brake			with		
Shaft height	Type	DIN IEC	a_1 P	b_1 N	c_1 LA	e_1 M	f AB	f_1 T	g_2 –	h H	i_2 –	s_2 S	k LB	o_1 –	o_2 –	brake ko$_1$ LB–		o_2 –
1FK7 Compact, type IM B5, natural cooling, with connector, with/without brake																		
20	1FK7011-5		–	30 (1.18)	7 (0.28)	46 (1.81)	40 (1.57)	2.5 (0.10)	65.5 (2.58)	20 (0.79)	18 (0.71)	4.5 (0.18)	140 (5.51)	89 (3.50)	118 (4.65)	140 (5.51)	89 (3.50)	118 (4.65)
	1FK7015-5		–	30 (1.18)	7 (0.28)	46 (1.81)	40 (1.57)	2.5 (0.10)	65.5 (2.58)	20 (0.79)	18 (0.71)	4.5 (0.18)	165 (6.50)	114 (4.49)	143 (5.63)	165 (6.50)	114 (4.49)	143 (5.63)
28	1FK7022-5		–	40 (1.57)	10 (0.39)	63 (2.48)	55 (2.17)	2.5 (0.10)	75 (2.95)	27.5 (1.08)	20 (0.79)	5.4 (0.21)	153 (6.02)	95 (3.74)	128 (5.04)	175 (6.89)	95 (3.74)	150 (5.91)
36	1FK7032-5		92 (3.62)	60 (2.36)	8 (0.31)	75 (2.95)	72 (2.83)	3 (0.12)	81 (3.19)	36 (1.42)	30 (1.18)	6.5 (0.26)	150 (5.91)	90 (3.54)	125 (4.92)	175 (6.89)	90 (3.54)	149 (5.87)
	1FK7034-5		92 (3.62)	60 (2.36)	8 (0.31)	75 (2.95)	72 (2.83)	3 (0.12)	81 (3.19)	36 (1.42)	30 (1.18)	6.5 (0.26)	175 (6.89)	115 (4.53)	150 (5.91)	200 (7.87)	115 (4.53)	174 (6.85)
48	1FK7040-5		120 (4.72)	80 (3.15)	10 (0.39)	100 (3.94)	96 (3.78)	3 (0.12)	90 (3.54)	48 (1.89)	40 (1.57)	7 (0.28)	134 (5.28)	73 (2.87)	106 (4.17)	163 (6.42)	73 (2.87)	135 (5.31)
	1FK7042-5		120 (4.72)	80 (3.15)	10 (0.39)	100 (3.94)	96 (3.78)	3 (0.12)	90 (3.54)	48 (1.89)	40 (1.57)	7 (0.28)	162 (6.38)	101 (3.98)	134 (5.28)	191 (7.52)	101 (3.98)	163 (6.42)
63	1FK7060-5		155 (6.10)	110 (4.33)	10 (0.39)	130 (5.12)	126 (4.96)	3.5 (0.14)	105 (4.13)	63 (2.48)	50 (1.97)	9 (0.35)	157 (6.18)	94 (3.70)	126 (4.96)	200 (7.87)	94 (3.70)	169 (6.65)
	1FK7063-5		155 (6.10)	110 (4.33)	10 (0.39)	130 (5.12)	126 (4.96)	3.5 (0.14)	105 (4.13)	63 (2.48)	50 (1.97)	9 (0.35)	202 (7.95)	139 (5.47)	171 (6.73)	245 (9.65)	139 (5.47)	214 (8.43)

		Basic absolute encoder (EnDat) (shaft height 48 and larger), Incremental encoder sin/cos1 V_{pp}						Absolute encoder (EnDat)										
		without brake			with brake			without brake			with							
Shaft height	Type	k LB	o_1 –	o_2 –	k LB	o_1 –	o_2 –	k LB	o_1 –	o_2 –	brake ko$_1$ LB–	o_2 –	d D	d_6 –	l E	t GA	u F
20	1FK7011-5	155 (6.10)	89 (3.50)	118 (4.64)	155 (6.10)	89 (3.50)	118 (4.64)	155 (6.10)	98 (3.50)	118 (4.64)	155 (6.10)	89 (3.50)	118 (4.64)	8 (0.31)	M3	18 (0.71)	8.8 (0.35)	2 (0.08)
	1FK7015-5	180 (7.08)	114 (4.48)	143 (5.63)	180 (7.08)	114 (4.48)	143 (5.63)	180 (7.08)	114 (4.48)	143 (5.63)	180 (7.08)	114 (4.48)	143 (5.63)	8 (0.31)	M3	18 (0.71)	8.8 (0.35)	2 (0.08)
28	1FK7022-5	178 (7.01)	95 (3.74)	128 (5.04)	200 (7.87)	95 (3.74)	150 (5.91)	178 (7.01)	95 (3.74)	128 (5.04)	200 (7.87)	95 (3.74)	150 (5.91)	9 (0.35)	M3	20 (0.79)	10.2 (0.40)	3 (0.12)
36	1FK7032-5	175 (6.89)	90 (3.54)	125 (4.92)	200 (7.87)	90 (3.54)	149 (5.87)	175 (6.89)	90 (3.54)	125 (4.92)	200 (7.87)	90 (3.54)	149 (5.87)	14 (0.55)	M5	30 (1.18)	16 (0.63)	5 (0.20)
	1FK7034-5	200 (7.87)	115 (4.53)	150 (5.91)	225 (8.86)	115 (4.53)	174 (6.85)	200 (7.87)	115 (4.53)	150 (5.91)	225 (8.86)	115 (4.53)	174 (6.85)	14 (0.55)	M5	30 (1.18)	16 (0.63)	5 (0.20)
48	1FK7040-5	155 (6.10)	73 (2.87)	106 (4.17)	184 (7.24)	73 (2.87)	135 (5.31)	163 (6.42)	73 (2.87)	106 (4.17)	192 (7.56)	73 (2.87)	135 (5.31)	19 (0.75)	M6	40 (1.57)	21.5 (0.85)	6 (0.24)
	1FK7042-5	182 (7.17)	101 (3.98)	134 (5.28)	211 (8.31)	101 (3.98)	163 (6.42)	191 (7.52)	101 (3.98)	134 (5.28)	220 (8.66)	101 (3.98)	163 (6.42)	19 (0.75)	M6	40 (1.57)	21.5 (0.85)	6 (0.24)
63	1FK7060-5	180 (7.09)	94 (3.70)	126 (4.96)	223 (8.78)	94 (3.70)	169 (6.65)	188 (7.40)	94 (3.70)	126 (4.96)	231 (9.09)	94 (3.70)	169 (6.65)	24 (0.94)	M8	50 (1.97)	27 (1.06)	8 (0.31)
	1FK7063-5	225 (8.86)	139 (5.47)	171 (6.73)	268 (10.55)	139 (5.47)	214 (8.43)	233 (9.17)	139 (5.47)	171 (6.73)	276 (10.87)	139 (5.47)	214 (8.43)	24 (0.94)	M8	50 (1.97)	27 (1.06)	8 (0.31)

1FK701 . –5
1FK702 . –5
1FK703 . –5
1FK704 . –5
1FK706 . –5

Shaft design with fitted key

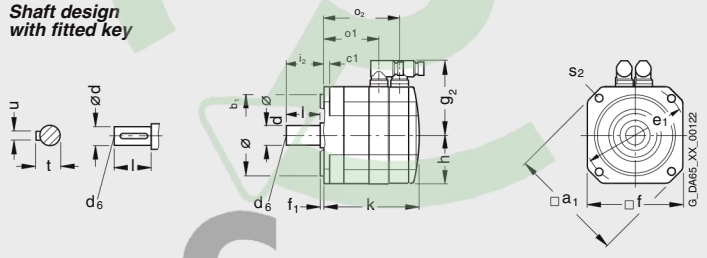

e-Servo