Table 7-7 1FK7042 CT

Technical data	Code	Unit	–5AF71	
Configuration data				
Rated speed	n_N	RPM	3000	
No. of poles	2p		8	
Rated torque (100 K)	$M_{N\ (100\ K)}$	Nm	2.6 1.95	
Rated current (100 K)	I_N	A	2.5	
Static torque (60 K)	$M_{0\ (60\ K)}$	Nm	3.0	
Static torque (100 K)	$M_{0\ (100\ K)}$	Nm	1.8	
Stall current (60 K)	$I_{0\ (60\ K)}$	A	2.2 3.73	
Stall current (100 K)	$I_{0\ (100\ K)}$	A	3.0	
Moment of inertia (with brake)	J_{MotBr}	10^{-4} kgm^2		
Moment of inertia (without brake)	J_{Mot}	10^{-4} kgm^2	3000	
Optimum operating point	n_{opt}	RPM	0.82	
Optimum speed	P_{opt}	kW	9000	
Optimum power	$n_{max\ mech}$	RPM	6500	
Limiting data	$n_{max\ Inv}$	RPM	10.5	
Max. permissible speed (mech.)	M_{max}	Nm	7.35	
Max. permissible speed (converter)	I_{max}	A	1.4	
Max. torque			89	
Max. current	k_T	Nm/A	5.15	
Physical constants	k_E	V/1000 RPM	29	
Torque constant	R_{Str}	Ohm	5.6 2.37	
Voltage constant	L_D	mH	30	
Winding resistance at 20°C	T_{el}	ms	16000	
Cyclic inductance	T_{mech}	ms	5.4	
Electrical time constant	T_{th}	min	4.9	
Mechanical time constant	c_t	Nm/rad		
Thermal time constant	m_{MotBr}	kg	3	
Shaft torsional stiffness	m_{Mot}	kg	6	
Weight with brake			8.4	
Weight without brake				
Recommended motor module 6SL312_-_TE13-0AA_				
Rated current converter	$I_{N\ Inv}$	A		
Max. current converter	$I_{max\ Inv}$	A		
Max. torque at $I_{max\ Inv}$	$M_{max\ Inv}$	Nm		

e-Servo

For motor		Dimensions in mm (in)											Resolver					
													without brake			with		
Shaft height	Type	DIN IEC	a_1 P	b_1 N	c_1 LA	e_1 M	f AB	f_1 T	g_2 –	h H	i_2 –	s_2 S	k LB	o_1 –	o_2 –	brake ko_1 LB–	o_2 –
1FK7 Compact, type IM B5, natural cooling, with connector, with/without brake																		
20	1FK7011-5	–		30 (1.18)	7 (0.28)	46 (1.81)	40 (1.57)	2.5 (0.10)	65.5 (2.58)	20 (0.79)	18 (0.71)	4.5 (0.18)	140 (5.51)	89 (3.50)	118 (4.65)	140 (5.51)	89 (3.50)	118 (4.65)
	1FK7015-5	–		30 (1.18)	7 (0.28)	46 (1.81)	40 (1.57)	2.5 (0.10)	65.5 (2.58)	20 (0.79)	18 (0.71)	4.5 (0.18)	165 (6.50)	114 (4.49)	143 (5.63)	165 (6.50)	114 (4.49)	143 (5.63)
28	1FK7022-5	–		40 (1.57)	10 (0.39)	63 (2.48)	55 (2.17)	2.5 (0.10)	75 (2.95)	27.5 (1.08)	20 (0.79)	5.4 (0.21)	153 (6.02)	95 (3.74)	128 (5.04)	175 (6.89)	95 (3.74)	150 (5.91)
36	1FK7032-5		92 (3.62)	60 (2.36)	8 (0.31)	75 (2.95)	72 (2.83)	3 (0.12)	81 (3.19)	36 (1.42)	30 (1.18)	6.5 (0.26)	150 (5.91)	90 (3.54)	125 (4.92)	175 (6.89)	90 (3.54)	149 (5.87)
	1FK7034-5		92 (3.62)	60 (2.36)	8 (0.31)	75 (2.95)	72 (2.83)	3 (0.12)	81 (3.19)	36 (1.42)	30 (1.18)	6.5 (0.26)	175 (6.89)	115 (4.53)	150 (5.91)	200 (7.87)	115 (4.53)	174 (6.85)
48	1FK7040-5		120 (4.72)	80 (3.15)	10 (0.39)	100 (3.94)	96 (3.78)	3 (0.12)	90 (3.54)	48 (1.89)	40 (1.57)	7 (0.28)	134 (5.28)	73 (2.87)	106 (4.17)	163 (6.42)	73 (2.87)	135 (5.31)
	1FK7042-5		120 (4.72)	80 (3.15)	10 (0.39)	100 (3.94)	96 (3.78)	3 (0.12)	90 (3.54)	48 (1.89)	40 (1.57)	7 (0.28)	162 (6.38)	101 (3.98)	134 (5.28)	191 (7.52)	101 (3.98)	163 (6.42)
63	1FK7060-5		155 (6.10)	110 (4.33)	10 (0.39)	130 (5.12)	126 (4.96)	3.5 (0.14)	105 (4.13)	63 (2.48)	50 (1.97)	9 (0.35)	157 (6.18)	94 (3.70)	126 (4.96)	200 (7.87)	94 (3.70)	169 (6.65)
	1FK7063-5		155 (6.10)	110 (4.33)	10 (0.39)	130 (5.12)	126 (4.96)	3.5 (0.14)	105 (4.13)	63 (2.48)	50 (1.97)	9 (0.35)	202 (7.95)	139 (5.47)	171 (6.73)	245 (9.65)	139 (5.47)	214 (8.43)

		Basic absolute encoder (EnDat) (shaft height 48 and larger), Incremental encoder sin/cos1 V_{pp}						Absolute encoder (EnDat)										
		without brake			with brake			without brake			with							
Shaft height	Type	k LB	o_1 –	o_2 –	k LB	o_1 –	o_2 –	k LB	o_1 –	o_2 –	brake ko_1 LB–	o_2 –	d D	d_6 –	l E	t GA	u F
20	1FK7011-5	155 (6.10)	89 (3.50)	118 (4.64)	155 (6.10)	89 (3.50)	118 (4.64)	155 (6.10)	98 (3.50)	118 (4.64)	155 (6.10)	89 (3.50)	118 (4.64)	8 (0.31)	M3	18 (0.71)	8.8 (0.35)	2 (0.08)
	1FK7015-5	180 (7.08)	114 (4.48)	143 (5.63)	180 (7.08)	114 (4.48)	143 (5.63)	180 (7.08)	114 (4.48)	143 (5.63)	180 (7.08)	114 (4.48)	143 (5.63)	8 (0.31)	M3	18 (0.71)	8.8 (0.35)	2 (0.08)
28	1FK7022-5	178 (7.01)	95 (3.74)	128 (5.04)	200 (7.87)	95 (3.74)	150 (5.91)	178 (7.01)	95 (3.74)	128 (5.04)	200 (7.87)	95 (3.74)	150 (5.91)	9 (0.35)	M3	20 (0.79)	10.2 (0.40)	3 (0.12)
36	1FK7032-5	175 (6.89)	90 (3.54)	125 (4.92)	200 (7.87)	90 (3.54)	149 (5.87)	175 (6.89)	90 (3.54)	125 (4.92)	200 (7.87)	90 (3.54)	149 (5.87)	14 (0.55)	M5	30 (1.18)	16 (0.63)	5 (0.20)
	1FK7034-5	200 (7.87)	115 (4.53)	150 (5.91)	225 (8.86)	115 (4.53)	174 (6.85)	200 (7.87)	115 (4.53)	150 (5.91)	225 (8.86)	115 (4.53)	174 (6.85)	14 (0.55)	M5	30 (1.18)	16 (0.63)	5 (0.20)
48	1FK7040-5	155 (6.10)	73 (2.87)	106 (4.17)	184 (7.24)	73 (2.87)	135 (5.31)	163 (6.42)	73 (2.87)	106 (4.17)	192 (7.56)	73 (2.87)	135 (5.31)	19 (0.75)	M6	40 (1.57)	21.5 (0.85)	6 (0.24)
	1FK7042-5	182 (7.17)	101 (3.98)	134 (5.28)	211 (8.31)	101 (3.98)	163 (6.42)	191 (7.52)	101 (3.98)	134 (5.28)	220 (8.66)	101 (3.98)	163 (6.42)	19 (0.75)	M6	40 (1.57)	21.5 (0.85)	6 (0.24)
63	1FK7060-5	180 (7.09)	94 (3.70)	126 (4.96)	223 (8.78)	94 (3.70)	169 (6.65)	188 (7.40)	94 (3.70)	126 (4.96)	231 (9.09)	94 (3.70)	169 (6.65)	24 (0.94)	M8	50 (1.97)	27 (1.06)	8 (0.31)
	1FK7063-5	225 (8.86)	139 (5.47)	171 (6.73)	268 (10.55)	139 (5.47)	214 (8.43)	233 (9.17)	139 (5.47)	171 (6.73)	276 (10.87)	139 (5.47)	214 (8.43)	24 (0.94)	M8	50 (1.97)	27 (1.06)	8 (0.31)

1FK701 . –5
1FK702 . –5
1FK703 . –5
1FK704 . –5
1FK706 . –5

Shaft design with fitted key

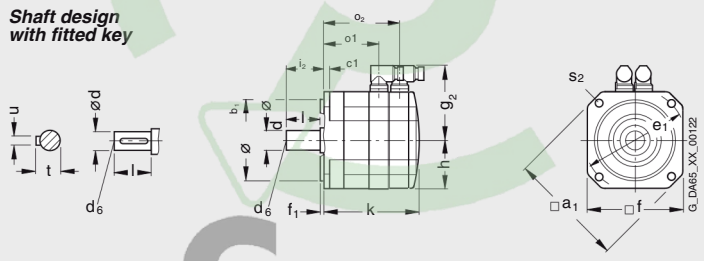

e-Servo