

Table 7-11 1FK7063 CT

Technical data	Code	Unit	-5AF71	
Configuration data				
Rated speed	n_N	RPM	3000	
No. of poles	2p		8	
Rated torque (100 K)	M_N (100 K)	Nm	7.3	
Rated current (100 K)	I_N	A	5.6	
Static torque (60 K)	M_0 (60 K)	Nm	9.1	
Static torque (100 K)	M_0 (100 K)	Nm	11	
Stall current (60 K)	I_0 (60 K)	A	6.6	
Stall current (100 K)	I_0 (100 K)	A	8.0 17.3	
Moment of inertia (with brake)	J_{MotBr}	10^{-4} kgm ²	15.1	
Moment of inertia (without brake)	J_{Mot}	10^{-4} kgm ²		
	n_{opt}	RPM	3000	
Optimum operating point	P_{opt}	kW	2.29	
Optimum speed	$n_{max\ mech}$	RPM	7200	
Optimum power	$n_{max\ Inv}$	RPM	6600 35	
Limiting data	M_{max}	Nm	28	
Max. permissible speed (mech.)	I_{max}	A	1.37	
Max. permissible speed (converter)	k_T	Nm/A	87.5	
Max. torque	k_E	V/1000 RPM	0.65 7.7	
Max. current	R_{Str}	Ohm	11.8	
Physical constants	L_D	mH	1.56	
Torque constant	T_{el}	ms	40	
Voltage constant	T_{mech}	ms	35000	
Winding resistance at 20°C	T_{th}	min	12	
Cyclic inductance	C_t	Nm/rad	11.5	
Electrical time constant	m_{MotBr}	kg	9	
Mechanical time constant	m_{Mot}	kg	18	
Thermal time constant		A	24.5	
Shaft torsional stiffness		A		
Weight with brake		Nm		
Weight without brake				
Recommended motor module 6SL312_- TE21-0AA_				
Rated current converter	$I_{N\ Inv}$			
Max. current converter	$I_{max\ Inv}$			
Max. torque at $I_{max\ Inv}$	$M_{max\ Inv}$			

e-Servo

For motor

Dimensions in mm (in)

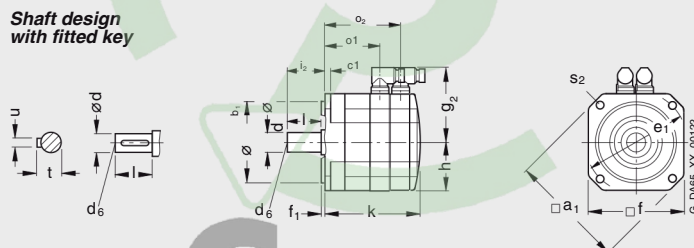
Resolver

Shaft height	Type	DIN IEC	a_1 P	b_1 N	c_1 LA	e_1 M	f AB	f_1 T	g_2 —	h H	i_2 —	s_2 S	Resolver				
													without brake		with brake ko_1		
													k LB	α_1 —	α_2 —	LB—	α_2 —
1FK7 Compact, type IM B5, natural cooling, with connector, with/without brake																	
20	1FK7011-5	—	30	7	46	40	2.5	65.5	20	18	4.5	140	89	118	140	89	118
	1FK7015-5	—	30	7	46	40	2.5	65.5	20	18	4.5	165	114	143	165	114	143
28	1FK7022-5	—	40	10	63	55	2.5	75	27.5	20	5.4	153	95	128	175	95	150
			(1.57)	(0.39)	(2.48)	(2.17)	(0.10)	(2.95)	(1.08)	(0.79)	(0.21)	(6.02)	(3.74)	(5.04)	(6.89)	(3.74)	(5.91)
36	1FK7032-5	92 (3.62)	60	8	75	72	3	81	36	30	6.5	150	90	125	175	90	149
	1FK7034-5	92 (3.62)	60	8	75	72	3	81	36	30	6.5	175	115	150	200	115	174
48	1FK7040-5	120 (4.72)	80	10	100	96	3	90	48	40	7	134	73	106	163	73	135
	1FK7042-5	120 (4.72)	80	10	100	96	3	90	48	40	7	162	101	134	191	101	163
63	1FK7060-5	155 (6.10)	110	10	130	126	3.5	105	63	50	9	157	94	126	200	94	169
	1FK7063-5	155 (6.10)	110	10	130	126	3.5	105	63	50	9	202	139	171	245	139	214

Basic absolute encoder (EnDat)
(shaft height 48 and larger),
Incremental encoder sin/cos1 V_{pp}

Absolute encoder (EnDat)

Shaft height	Type	without brake			with brake			without brake			with brake ko_1			d D	d_6 —	l E	t GA	u F
		k LB	α_1 —	α_2 —	k LB	α_1 —	α_2 —	k LB	α_1 —	α_2 —	LB—	α_2 —	α_2 —					
20	1FK7011-5	155 (6.10)	89 (3.50)	118 (4.64)	155 (6.10)	89 (3.50)	118 (4.64)	155 (6.10)	98 (3.50)	118 (4.64)	155 (6.10)	89 (3.50)	118 (4.64)	8 (0.31)	M3	18 (0.71)	8.8 (0.35)	2 (0.08)
	1FK7015-5	180 (7.08)	114 (4.48)	143 (5.63)	180 (7.08)	114 (4.48)	143 (5.63)	180 (7.08)	114 (4.48)	143 (5.63)	180 (7.08)	114 (4.48)	143 (5.63)	8 (0.31)	M3	18 (0.71)	8.8 (0.35)	2 (0.08)
28	1FK7022-5	178 (7.01)	95 (3.74)	128 (5.04)	200 (7.87)	95 (3.74)	150 (5.91)	178 (7.01)	95 (3.74)	128 (5.04)	200 (7.87)	95 (3.74)	150 (5.91)	9 (0.35)	M3	20 (0.79)	10.2 (0.40)	3 (0.12)
36	1FK7032-5	175 (6.89)	90 (3.54)	125 (4.92)	200 (7.87)	90 (3.54)	149 (5.87)	175 (6.89)	90 (3.54)	125 (4.92)	200 (7.87)	90 (3.54)	149 (5.87)	14 (0.55)	M5	30 (1.18)	16 (0.63)	5 (0.20)
	1FK7034-5	200 (7.87)	115 (4.53)	150 (5.91)	225 (8.86)	115 (4.53)	174 (6.85)	200 (7.87)	115 (4.53)	150 (5.91)	225 (8.86)	115 (4.53)	174 (6.85)	14 (0.55)	M5	30 (1.18)	16 (0.63)	5 (0.20)
48	1FK7040-5	155 (6.10)	73 (2.87)	106 (4.17)	184 (7.24)	73 (2.87)	135 (5.31)	163 (6.42)	73 (2.87)	106 (4.17)	192 (7.56)	73 (2.87)	135 (5.31)	19 (0.75)	M6	40 (1.57)	21.5 (0.85)	6 (0.24)
	1FK7042-5	182 (7.17)	101 (3.98)	134 (5.28)	211 (8.31)	101 (3.98)	163 (6.42)	191 (7.52)	101 (3.98)	134 (5.28)	220 (8.66)	101 (3.98)	163 (6.42)	19 (0.75)	M6	40 (1.57)	21.5 (0.85)	6 (0.24)
63	1FK7060-5	180 (7.09)	94 (3.70)	126 (4.96)	223 (8.78)	94 (3.70)	169 (6.65)	188 (7.40)	94 (3.70)	126 (4.96)	231 (9.09)	94 (3.70)	169 (6.65)	24 (0.94)	M8	50 (1.97)	27 (1.06)	8 (0.31)
	1FK7063-5	225 (8.86)	139 (5.47)	171 (6.73)	268 (10.55)	139 (5.47)	214 (8.43)	233 (9.17)	139 (5.47)	171 (6.73)	276 (10.87)	139 (5.47)	214 (8.43)	24 (0.94)	M8	50 (1.97)	27 (1.06)	8 (0.31)

1FK701 .-5
1FK702 .-5
1FK703 .-5
1FK704 .-5
1FK706 .-5Shaft design
with fitted key

e-Servo